




Features

- High output White with 94+ CRI offers up to 240 lumens per foot using only 4.6 watts/foot; Warm White yields 220 lumens per foot
- Dimmable with Trulux controllers and most electronic low voltage dimmers
- Field cuttable (once per reel) every 3.94"
- Sealed IP68 power input can be used with 10ft and 20ft jumpers for wet and submerged tape locations
- Run lengths up to 16.4 feet
- 50,000 hours rated life

Available CCT



3000K 4000K

Control Options

- Trulux Single Color Controls
- Requires Adaptive Driver + Trulux Receiver
- Primary Side Dimming
- Requires Standard Dimmer + Adaptive Driver

Listing / Ratings




TRULUX™ Submersible - 24V

For water features or wet location applications, Trulux Submersible tape is a highly sought after solution. With an IP68 outdoor submersible rating, our submersible tape can withstand most natural elements and can be field cut for custom applications making for a great go to for small ponds and fountain lighting solutions.

Technical Information

Series	HTL68
Input Voltage	24V
CCT	3000K / 4000K
CRI	94+
Wattage	4.6W per ft
Lumens	Up to 240Lm per ft
Max Run	16.4 feet
Cuttable	** Every 3.94" **
IP Rating	IP68 (silicone encased)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

** Field cuttable (once per reel) - must be sealed with IP68 end caps and silicone

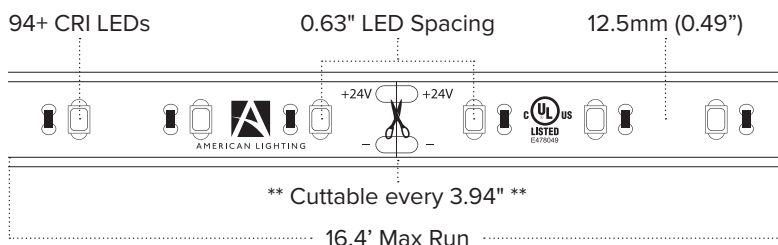



3000K
IP68 - Warm White
 4.6W per ft / 220Lm per ft

4000K
IP68 - White
 4.6W per ft / 240Lm per ft

16.4ft Reels



HTL68-WW (16.4ft)

HTL68-WH (16.4ft)

HTL68-WW/WH (IP68) 16.4ft Reels include: (1) Female connector / (15) Mounting Clips / (2) IP68 End Caps

Trulux Submersible Accessories



Extension Cable
 Single Color (IP68)
TL-2JUMP68-10 (10ft)
TL-2JUMP68-20 (20ft)



IP68 Mounting Clips
 (Qty of 15)
TL-CLIPS-15

Trulux Single Color Control



Single Zone Push Dial
 Wireless RF Wall Controller
SRF-BATT




4 Zone Touch Slide
 RF Wall Controller
SRF-4Z-3P



Trulux RF Receiver
 (Required for Trulux Controllers)
REC-5A-4Z

Trulux Single Color Set-up



Push Dial Controller
 (Single zone)



Adaptive LED Driver
 (30W / 60W / 96W / 192W / 288W)




Trulux RF Receiver
 (Required)



Trulux Tape Light

Primary Side Dimming Set-up



Standard Dimmer



Adaptive LED Driver
 (30W / 60W / 96W / 192W / 288W)



Trulux Tape Light